

Location: _____



CV

**BRONZE SILENT CHECK VALVE
THREADED AND SWEAT CONNECTIONS**

Specification: The Beeco® Silent Check Valve is designed to reduce water hammer while performing all the same requirements of a swing check valve. The Sweat Version is designed to solder into lines without disassembly; a low temperature solder should be used in order to eliminate damage to the seating surface.

Ratings:



Maximum Working Pressure 400 psi (27.6 bars);
Temperature Rating -20° to 100° F (-29° C to 38° C).
Maximum temperature rating is 400° F.

Materials:

Body is made on C87800 no lead Bronze; Adapter and the Check are made from low lead C6802 Brass; Spring, Spring Guide and Stem are all made from a 300 series Stainless Steel, and the Seat is a high temperature Viton material.

Features:

Due to its poppet design, the Beeco Silent Check Valve can be installed in either the horizontal or vertical position. Its silent operation and low pressure drop make it superior to most swing check valves.
Comes in both IPS and SWEAT connections.

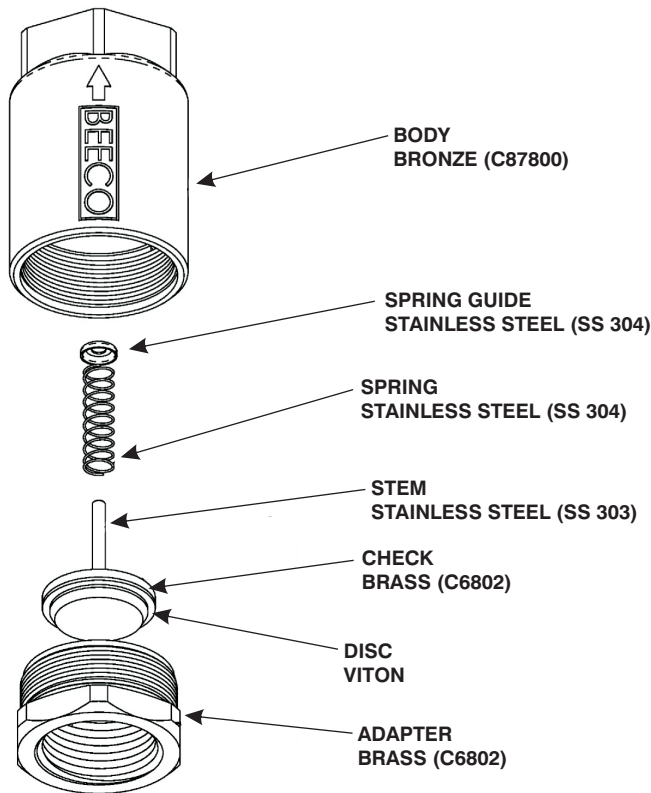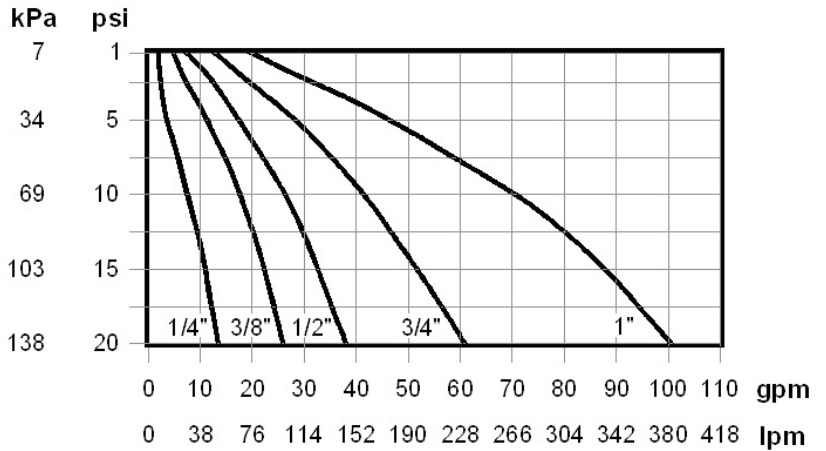

Model No.	Size
CV.25-IPS-LL	1/4"
CV.375-IPS-LL	3/8"
CV.50-IPS-LL	1/2"
CV.75-IPS-LL	3/4"
CV1.00-IPS-LL	1"
CV.50-SWT-LL	1/2"
CV.75-SWT-LL	3/4"
CV1.00-SWT-LL	1"

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

BEECO reserves the right to make changes in material and design without formal notice and obligation.