

Location: _____



GV-FXF-OSY

FLANGED BY FLANGED OSY

Specification: BEECO Series GV-FXF-OSY is a Flanged by Flanged Gate Valve. They feature an epoxy-coated, ductile body, all flange dimensions comply with ANSI B16.1, they have resilient wedge disc, ductile bonnet, a stainless steel stem and cast iron handwheel. Valves comply with AWWA C515 standard. Maximum Pressure: 230 psi (16 bar) CWP.

Function: Used in irrigation and water distribution. The BEECO Series GV-FXF-OSY is best used in the fully opened or fully closed position but can be used as a throttling valve.

Features:

» All BEECO OSY Valves come with Stainless Steel Stem for better corrosion resistance.

» Post indicators - body upright and wall types.


» Pre-grooved stems for tamper switch attachment

Ratings:

» Valves are rated for a working pressure of 16 bars class 125.

» Valves have a temperature rating up to 250° C (120° F).

» Valve complies with AWWA C515 standard.

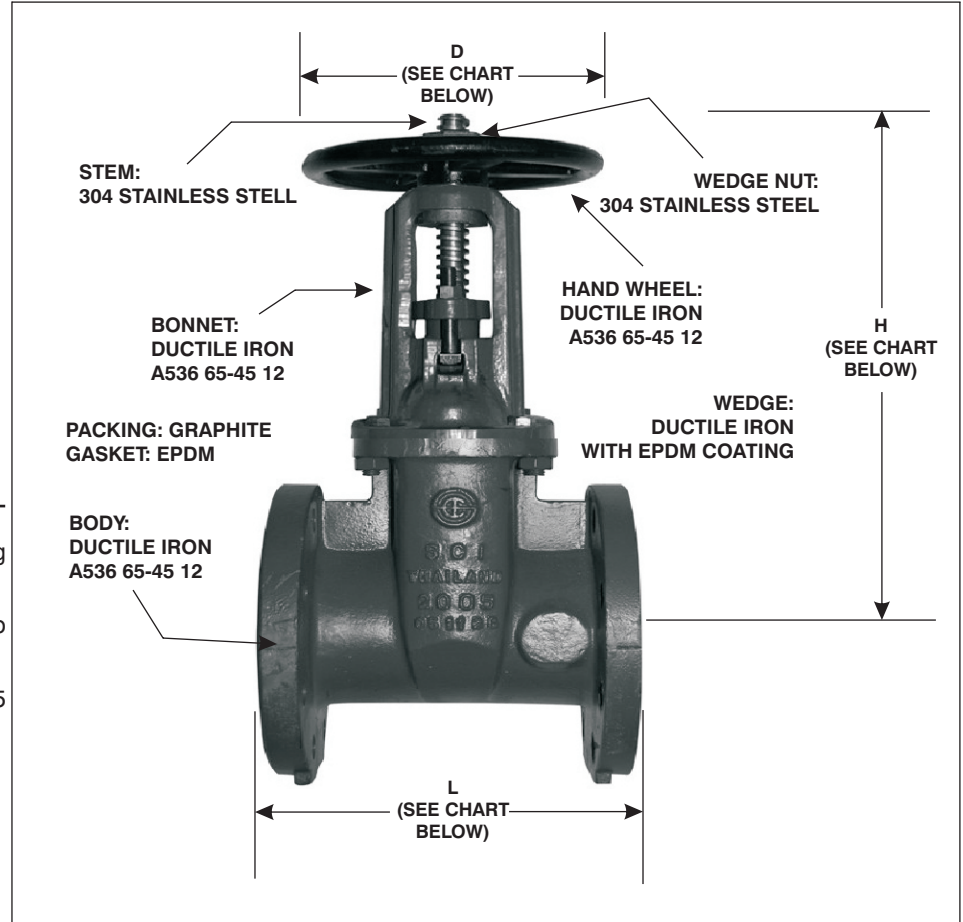

Model No.	Valve Size	L	H	D
GV2.50-FXF-OSY	2 1/2" (65)	7 1/2" (191)	16 3/8" (415)	10" (254)
GV3.00-FXF-OSY	3" (76)	8" (203)	18 7/8" (480)	10" (254)
GV4.00-FXF-OSY	4" (102)	9" (229)	21 5/8" (550)	10" (254)
GV6.00-FXF-OSY	6" (152)	10 1/2" (267)	29 1/8" (740)	12" (305)
GV8.00-FXF-OSY	8" (203)	11 1/2" (292)	36 5/8" (930)	14" (356)
GV10.00-FXF-OSY	10" (254)	13" (330)	44 1/2" (1130)	17 1/2" (445)

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____