

Location: \_\_\_\_\_



# GV-FXF-UL/FM

FLANGED BY FLANGED UL/FM

**Specification:** BEECO Series GV-FXF-UL/FM-OSY is a Flanged by Flanged Gate Valve. They are UL/FM approved and comply with SP-70. Ductile body is epoxy-coated with ANSI B16.1 flanged connections, resilient wedge disc, ductile bonnet, a stainless steel stem and ductile handwheel. Maximum Pressure: 300psi (21 bar) CWP.

**Function:** Used in fire protection as fire main shutoff valves and water distribution. The BEECO Series GV-FXF-UL/FM-OSY is best used in the fully opened or fully closed position but can be used as a throttling valve.

**Features:**

» All BEECO OSY UL FM Valves come with Stainless Steel Stem for better corrosion resistance (competitors use brass).

» All valves are Fusion Bonded Epoxy Coated in Fire Engine Red.

» Post indicators - both upright and wall types.

» Pre-grooved stems for tamper switch attachment.

» Pressure tested at 5 times the working pressure.


**Ratings:**

» Pressure tested at 5 times the working pressure; valves comply with AWWA C515.

» Valves are rated for a working pressure of 21 bars/300.P.S.I.

» Valves have passed a 1,000 cycle test requirement.

» Face-to-face dimensions of the valves comply with the American Standard for face-to-face dimensions (ANSI B16.10) for Class 125 cast iron flanged valves.

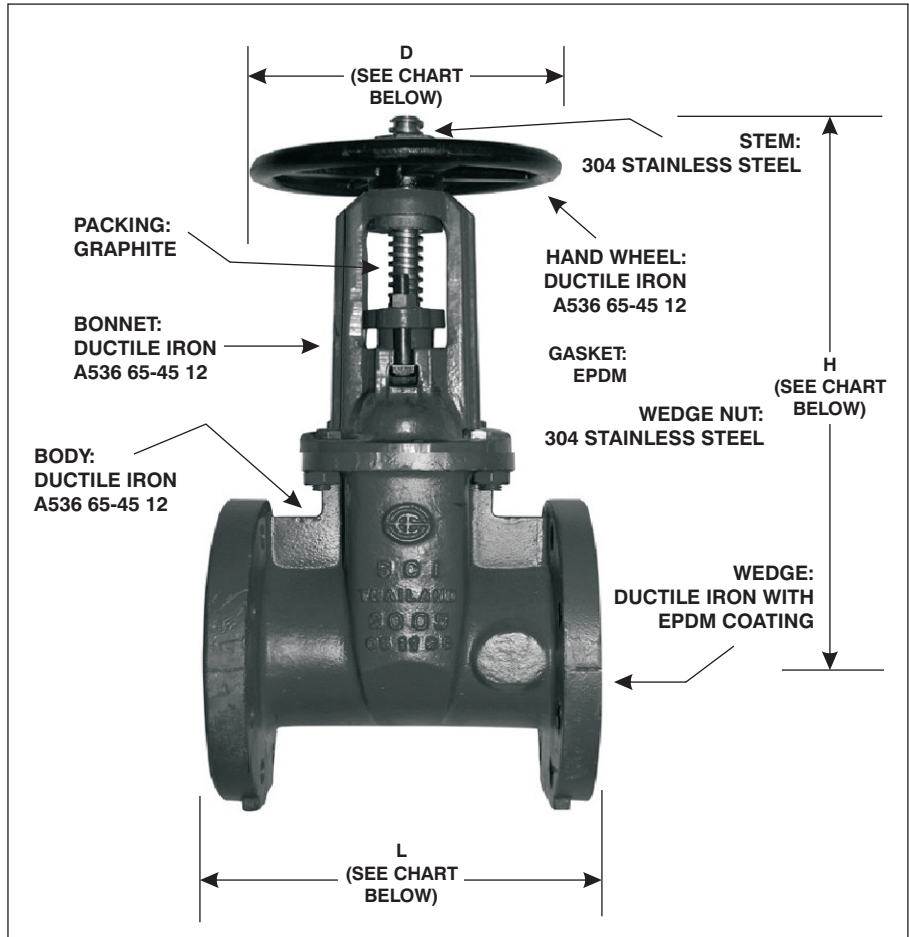

Model No.	Valve Size	L	H	D
GV2.50-FXF-UL-OSY	2 1/2" (65)	7 1/2" (191)	16 3/8" (415)	10" (254)
GV3.00-FXF-UL-OSY	3" (76)	8" (203)	18 7/8" (480)	10" (254)
GV4.00-FXF-UL-OSY	4" (102)	9" (229)	21 5/8" (550)	10" (254)
GV6.00-FXF-UL-OSY	6" (152)	10 1/2" (267)	29 1/8" (740)	12" (305)
GV8.00-FXF-UL-OSY	8" (203)	11 1/2" (292)	36 5/8" (930)	14" (356)
GV10.00-FXF-UL-OSY	10" (254)	13" (330)	44 1/2" (1130)	17 1/2" (445)

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_