

Location: _____



GV-FXG-NRS

FLANGED BY GROOVED NRS

Specification: BEECO Series GV-FXG-NRS is a Flanged by Grooved Gate Valve. They feature a non-rising stem for compact areas, they feature an epoxy-coated, ductile body, all flange dimensions comply with ANSI B16.1, all grooved dimensions comply with AWWA C606, they have resilient wedge disc, ductile bonnet, a stainless steel stem and cast iron handwheel. Maximum Pressure: 230 psi (16 bar) CWP. Valves comply with AWWA C515 standard.


Function: Used in irrigation and water distribution The BEECO Series GV-FXG-NRS is best used in the fully opened or fully closed position but can be used as a throttling valve.

Features:

- » Valves are designed to take a Hand Wheel or an Actuator.
- » Valves are rated for a working pressure of 21 bars/300 P.S.I.
- » All valves are Fusion Bonded Epoxy Coated.

Ratings:

- » All BEECO NRS Values come with Stainless Steel stem. (competitors use brass).
- » Working pressure class 125 pressure valves are rated for a working pressure of 21 bars/300 P.S.I.
- » Valve complies with AWWA C515 standard.

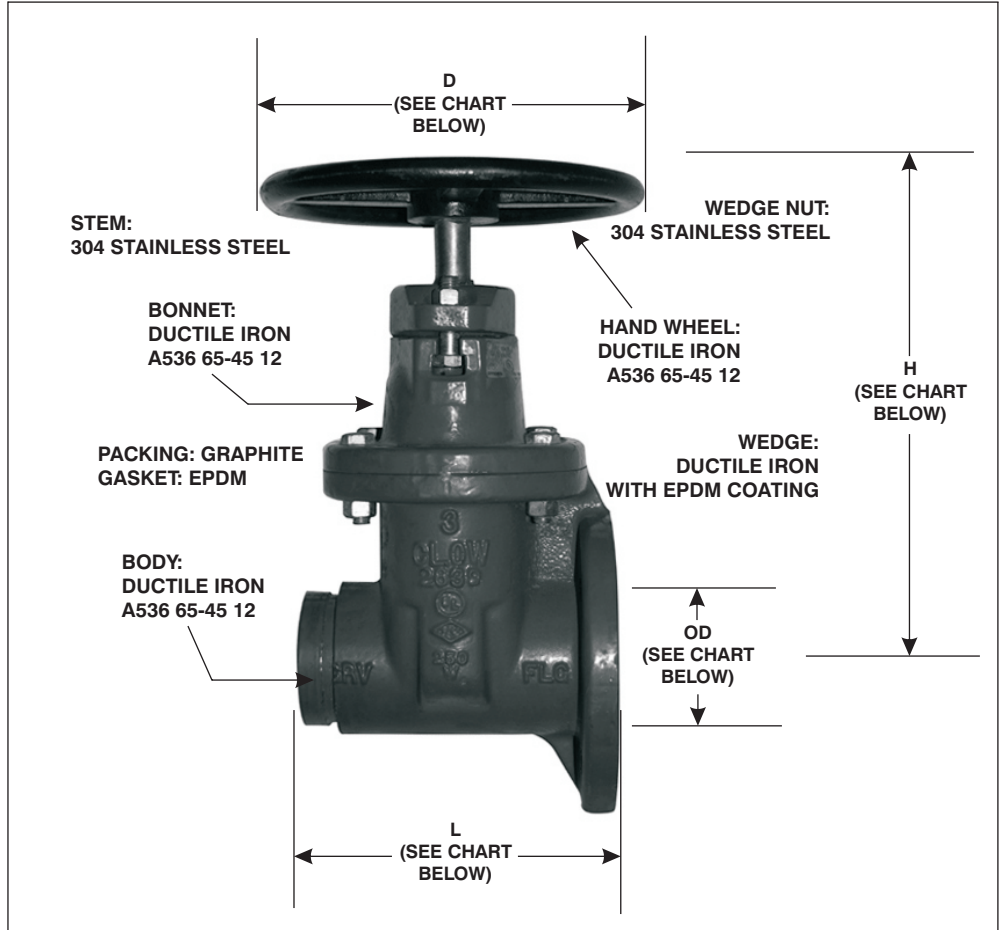

| Model No. | Valve Size | L | H | D | OD |
|-----------------|-------------|---------------|----------------|---------------|------------------------------|
| GV2.50-FXG-NRS | 2 1/2" (65) | 7 1/2" (191) | 16 3/8" (415) | 10" (254) | 2 7/8" (73.0), 3" (76) |
| GV3.00-FXG-NRS | 3" (76) | 8" (203) | 18 7/8" (480) | 10" (254) | 3.5" (88.9) |
| GV4.00-FXG-NRS | 4" (102) | 9" (229) | 21 5/8" (550) | 10" (254) | 4.5" (114.3) |
| GV6.00-FXG-NRS | 6" (152) | 10 1/2" (267) | 29 1/8" (740) | 12" (305) | 6.5" (165.1), 6 5/8" (168.3) |
| GV8.00-FXG-NRS | 8" (203) | 11 1/2" (292) | 36 5/8" (930) | 14" (356) | 8 5/8" (219.1) |
| GV10.00-FXG-NRS | 10" (254) | 13" (330) | 44 1/2" (1130) | 17 1/2" (445) | 10 3/4" (273) |

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____