

Location: _____




F1000-S

FLOOR DRAIN WITH HEAVY DUTY SQUARE STAINLESS STEEL STRAINER

Specification: MIFAB® Series F1000-S(*)-3 (* specify strainer size) lacquered cast iron floor drain with anchor flange, weepholes, and standard heavy duty square polished stainless steel strainer. (For membrane floors, add -C to Series number)

Function: Used in showers, kitchens, restrooms, and other non-membrane finished areas. Square adjustable stainless steel strainer is used for floors that are finished of material or straight line patterns.

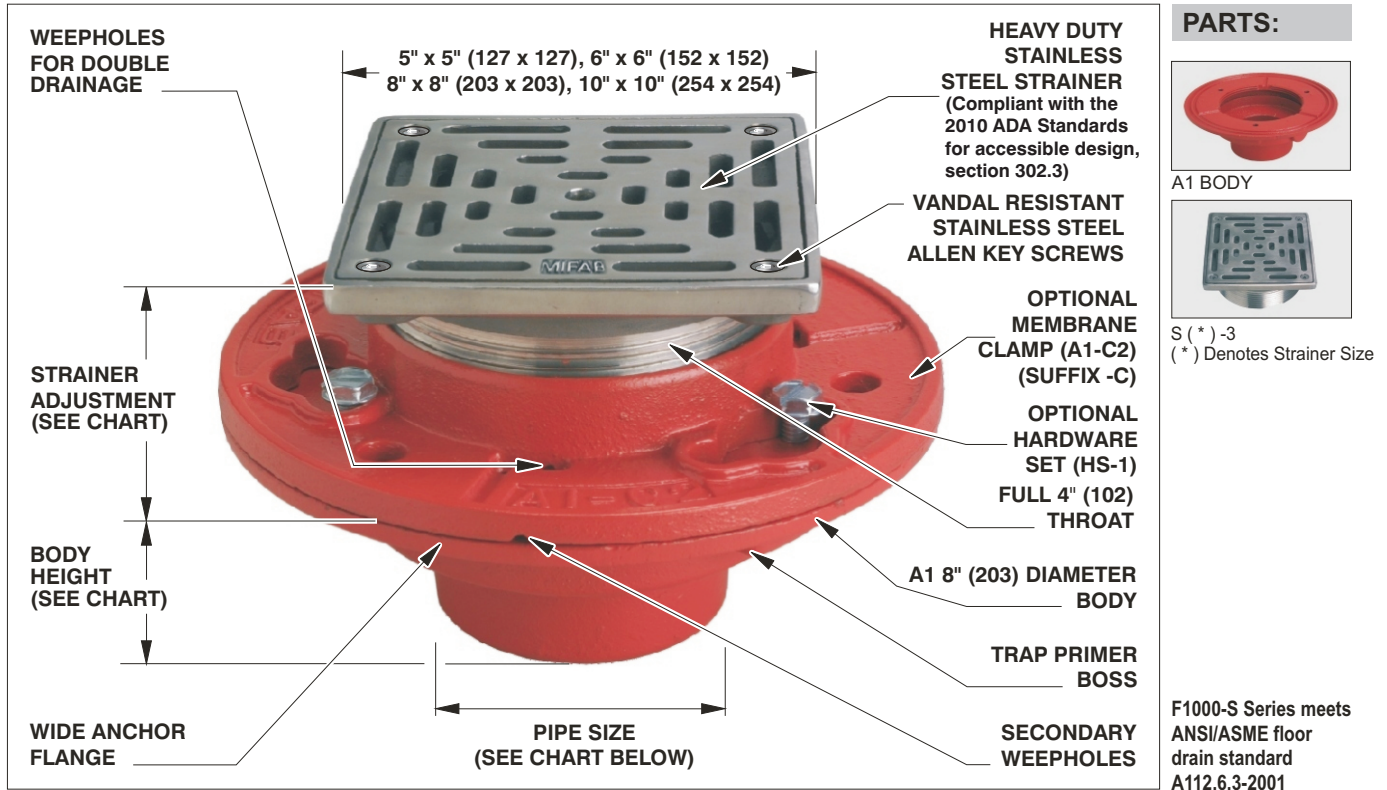

STRAINER SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	FREE AREA	LOAD RATING LBS. S.S. (-3)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
5"x5" (127)	5/8" (15)	1 9/16" (40)	9 in ² (5800 ³)	5000 to 7499	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
6"x6" (152)	7/8" (22)	1 9/16" (40)	12 in ² (7700 ²)	5000 to 7499	3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
8"x8" (203)	1 1/4" (32)	2 3/16" (56)	26 in ² (16800 ²)	5000 to 7499	4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
10"x10" (254)	1 1/4" (32)	2 3/16" (56)	28 in ² (19913 ²)	5000 to 7499	5" (127)	3" (76)	—	2 5/8" (67)	3 3/4" (95)	—
					6" (152)	3 1/4" (83)	6 1/2" (165)	—	—	—

SUFFIX OPTIONAL VARIATIONS:

- 3 Stainless steel strainer (standard)
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2",3",4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 21 Secondary flat stainless steel strainer (2",3",4")
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body

SUFFIX

- 31 ABS socket connection body
- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver
- 90 Threaded side outlet (2",3",4) (cast iron only)
- 90NH No hub side outlet (2",3",4") (cast iron only)
- 95 Client logo
- ARRA ARRA (Stimulus Act) compliant product
- BA Buy American Act compliant product
- C Membrane clamp (min. 1 3/4" (44))

SUFFIX

- C1 Membrane clamp for low rough-in (min. 5/8" (15))
- F4 4" Round funnel
- F6 6" Round funnel
- G Oval 4" x 9" funnel
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- J 3" x 1" funnel
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name _____ Page No: _____
 Section No: _____ Contractor _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.