

Location: _____





F1100-AS

FLOOR DRAIN WITH ANGLE STRAINER FOR NON-MEMBRANE FLOOR AREAS

Specification: MIFAB Series F1100-AS-1 lacquered cast iron floor drain with anchor flange, weepholes, and "AS" angle satin finished nickel bronze strainer with vandal resistant stainless steel allen key screws. (For non-membrane floors, use MIFAB F1100-AS Series.)

Function: Used in showers, kitchens, restrooms, and other non-membrane finished areas where the drain is installed at the floor and wall junction. The vertical grate openings allow water to continue to drain if the horizontal grate openings become clogged.

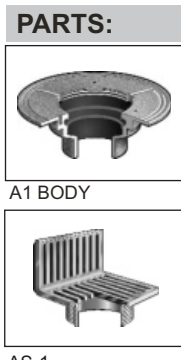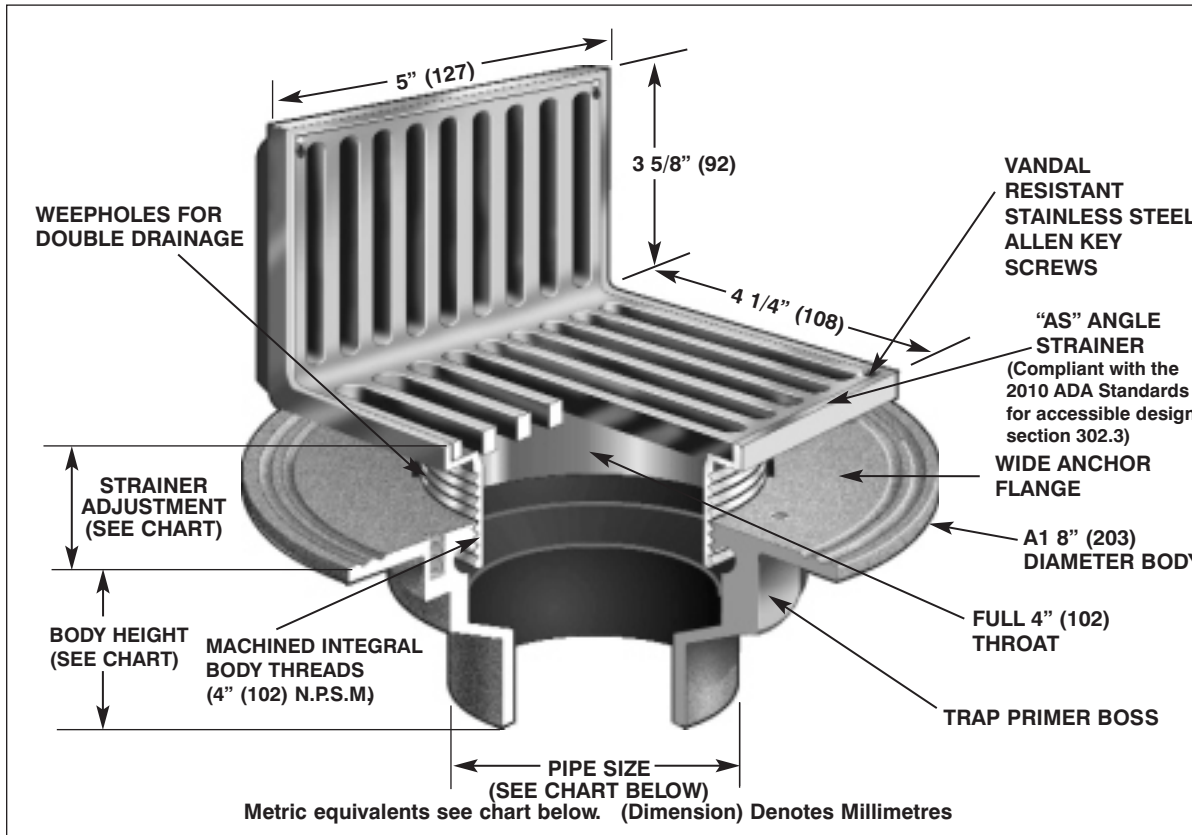

F1100-AS Series meets ANSI-ASME floor drain standard A112.6.3-2001

STRAINER SIZE	STRAINER ADJUSTMENT MIN MAX		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
			FREE AREA	LOAD RATING N.B. (-1)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
4" x 5" x 4" (102) x (127) x (102)	1/2" (13)	1 5/8" (41)	30.0 in ² (19354 ²)	UP TO 2,000 LBS.	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
					3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					5" (127)	3" (76)	—	2 5/8" (67)	3 3/4" (95)	—
					6" (152)	3 1/4" (83)	6 1/2" (165)	—	—	—

- | | | | | | |
|---------------|--|---------------|--|---------------|--|
| SUFFIX | OPTIONAL VARIATIONS: | SUFFIX | | SUFFIX | |
| -1 | Nickel bronze strainer (standard) | -34 | Closure plug | -C | Membrane Clamp |
| -5 | Sediment bucket | -40 | Underdeck clamp | -C1 | Clamp ring for low rough-in (min. 1/2" (13)) |
| -6 | Security screws (T-20 Torx & pin) | -41 | Sump receiver | (Standard) | No hub outlet |
| -7 | 1/2" trap seal primer connection | -49 | Chrome plated strainer | P | Push on outlet |
| -8 | Backwater valve (2", 3", 4") | -90 | Threaded side outlet (2", 3", 4") (cast iron only) | -PA | Pennsylvania Steel Act compliant product |
| -11 | Acid resistant epoxy coated body | -90NH | No hub side outlet (2", 3", 4") (cast iron only) | T | Threaded outlet (2", 3", 4") |
| -13 | Galvanized body | -95 | Client logo | X | Inside caulk outlet |
| -15 | Extension | -ARRA | ARRA (Stimulus Act) compliant product | -Z | Extended wide elastomeric flange |
| -21 | Secondary flat stainless steel strainer (2", 3", 4") | -BA | Buy American Act compliant product | | |
| -28 | Stainless steel body (Type 304) | | | | |
| -30 | PVC socket connection body | | | | |
| -31 | ABS socket connection body | | | | |

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____