

Location: _____




F1100-C-HG


FLOOR DRAIN WITH ROUND HINGED STRAINER FOR MEMBRANE FLOOR AREAS

Specification: MIFAB® Series F1100-C-(*)HG-3 (* specify strainer diameter) lacquered cast iron floor drain with anchor flange, cast iron membrane clamp with primary and secondary weepholes for waterproofing membrane, and hinged heavy duty, polished stainless steel strainer with vandal resistant stainless steel allen key screws. (For non-membrane floors, delete -C from Series number).


Function: Used in showers, kitchens, restrooms and other membrane finished areas. Hinged grate ensures that grate is not lost during maintenance. Round adjustable stainless steel hinged strainer is used for all types of poured finished floors. Strainer will not dish or corrode and is foot friendly.

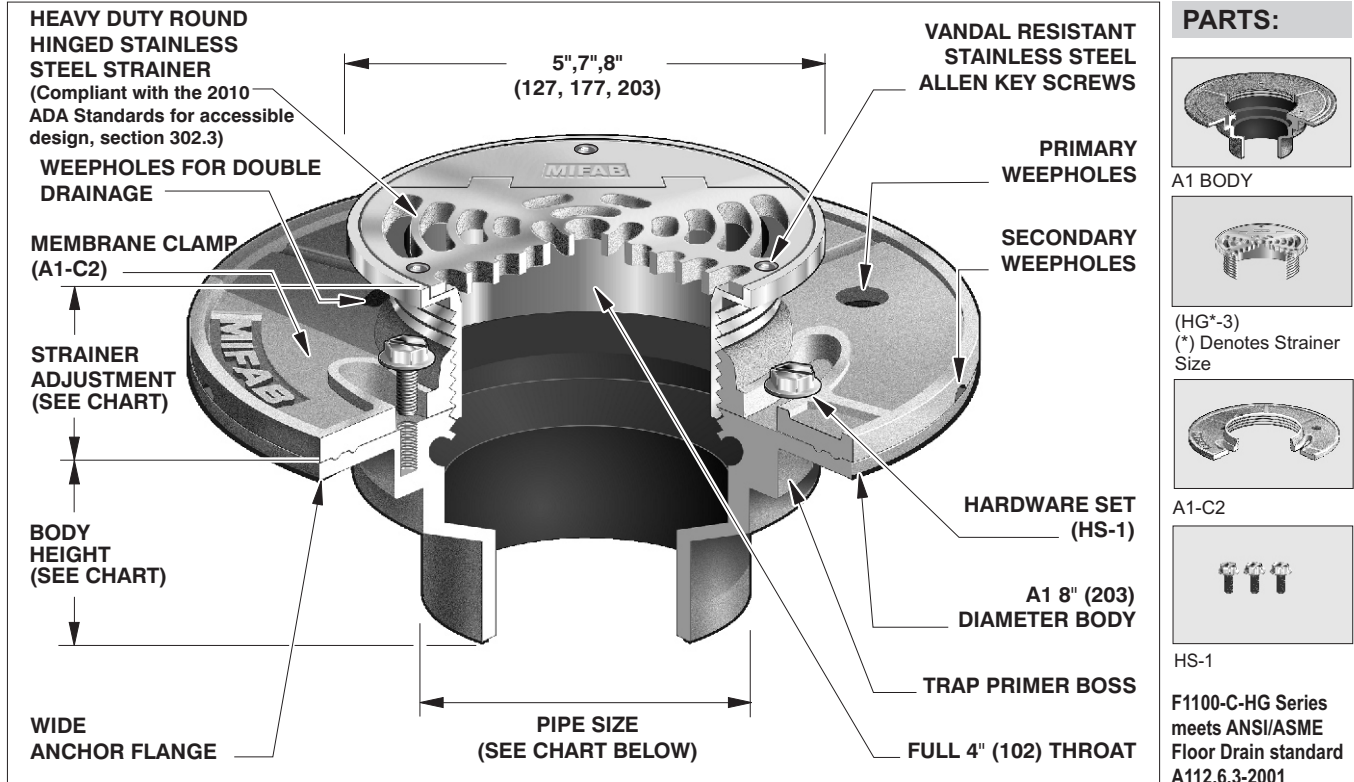


PARTS:




A1 BODY



(HG*-3)
(*) Denotes Strainer Size



A1-C2



HS-1

F1100-C-HG Series meets ANSI/ASME Floor Drain standard A112.6.3-2001

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	FREE AREA	LOAD RATING LBS. S.S. (-3)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
5" (127)	1 9/16" (40)	2 11/16" (68)	8in ² (5200 ²)	5000 to 7499	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
7" (177)	1 1/2" (38)	2 5/8" (67)	12in ² (7700 ²)	5000 to 7499	3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
8" (203)	1 7/8" (48)	2 3/4" (70)	18in ² (11600 ²)	5000 to 7499	4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					5" (127)	3" (76)	—	2 5/8" (67)	3 3/4" (95)	—
					6" (152)	3 1/4" (83)	6 1/2" (165)	—	—	—

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX	SUFFIX
-3	Stainless steel strainer (standard)	-31	ABS socket connection body
-5	Sediment bucket	-34	Closure plug
-6	Security screws (T-20 Torx & pin)	-40	Under deck clamp
-7	1/2" trap seal primer connection	-41	Sump receiver
-8	Backwater valve (2", 3", 4")	-49	Chrome plated strainer assembly (cast iron only)
-11	Acid resistant epoxy coated body	-90	Threaded side outlet (2", 3", 4")
-13	Galvanized body	-90NH	No hub side outlet (2", 3", 4") (cast iron only)
-15	Extension	-95	Client logo
-21	Secondary flat stainless steel strainer	-ARRA	ARRA (Stimulus Act) compliant product
-28	Stainless steel body (Type 304)	-BA	Buy American Act compliant product
-30	PVC socket connection body		
-C1	Clamp ring for low rough-in (min. 1/2" (13))		
-F4	4" Round funnel		
-F6	6" Round funnel		
-G	Oval 4" x 9" funnel		
-J	3" x 1" funnel		
(Standard)	No hub outlet		
P	Push on outlet		
-PA	Pennsylvania Steel Act compliant product		
T	Threaded outlet		
X	Inside caulk outlet		
-Z	Extended wide elastomeric flange		

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____