Location: _____

MIFAB® F1100-SD

FLOOR DRAIN WITH SQUARE SOLID HINGED COVER FOR NON-MEMBRANE FLOOR AREAS

Specification: MIFAB Series F1100-SD lacquered cast iron floor drain with anchor flange, weepholes, and standard reinforced, ("SD6") square 6" x 6" (152 x 152) (specify material finish) strainer with solid hinged cover and secondary grate. (For membrane floors, use MIFAB F1100-C-SD Series.)

Function: Used in showers, kitchens, restrooms and other non-membrane finished areas where infrequent drain use is required. The solid cover prevents debris from entering the drain which should be cleaned up before washdown. Square adjustable strainer is used for floors that are finished of material or straight line patterns.

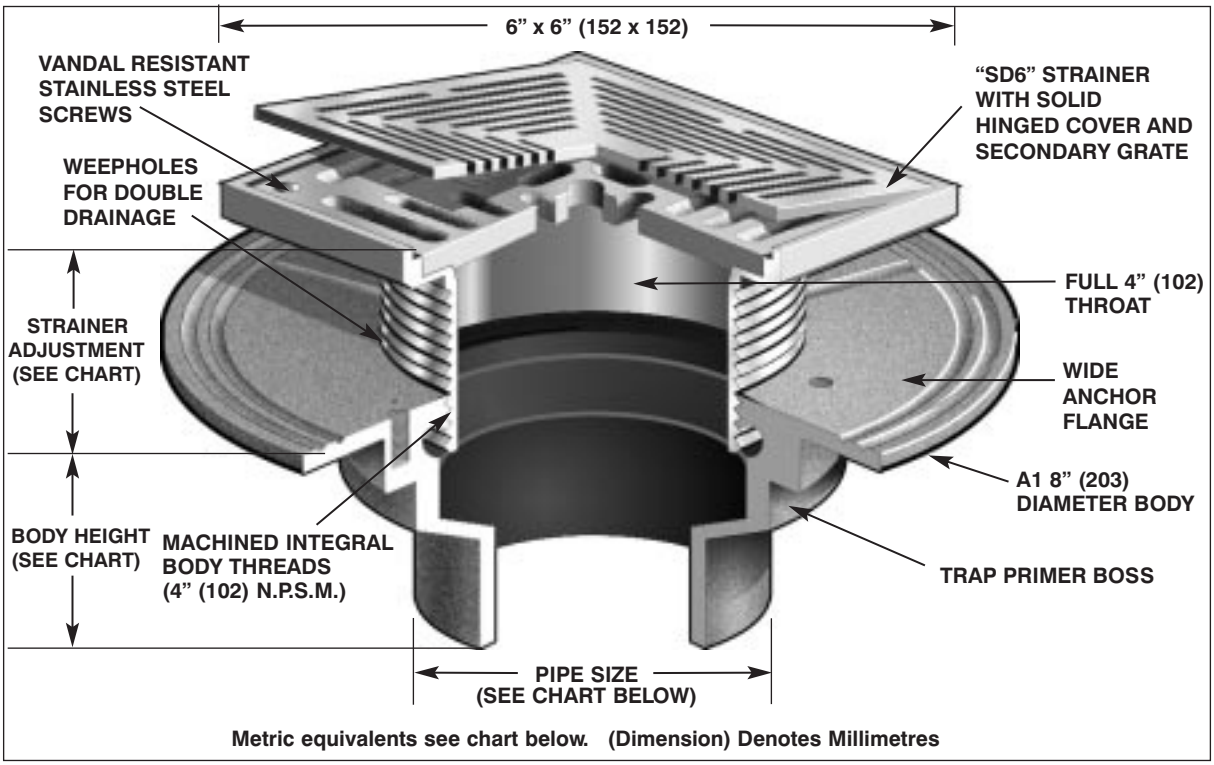

Metric equivalents see chart below. (Dimension) Denotes Millimetres

PARTS:



A1 BODY

SD6-(*)
(*) Denotes Strainer Finish (-1 or -3)

F1100-SD Series meets ANSI-ASME floor drain standard A112.6.3-2001

STRAINER SIZE	STRAINER ADJUSTMENT MIN	STRAINER ADJUSTMENT MAX	ANSI/ASME RATING FREE AREA	ANSI/ASME RATING LOAD RATING N.B. (-1)	PIPE SIZE	BODY HEIGHT NO HUB (STANDARD)	BODY HEIGHT PUSH ON (P)	BODY HEIGHT THREADED (T)	BODY HEIGHT INSIDE CAULK (X)	BODY HEIGHT PVC/ABS (-30)/(-31)
6" x 6" (152 x 152)	15/16" (24)	1 7/8" (48)	12 in² (7700²)	UP TO 2,000 LBS.	2" (51) ◯	3" (76) ☐	3 3/8" (86) ☐	2 1/4" (57) ☐	3 3/4" (95) ☐	2 15/16" (75) ☐
					3" (76) ◯	3" (76) ☐	3 3/8" (86) ☐	2 5/8" (67) ☐	3 3/4" (95) ☐	3 3/4" (95) ☐
					4" (102) ◯	3" (76) ☐	3 3/8" (86) ☐	2 5/8" (67) ☐	3 3/4" (95) ☐	3 3/4" (95) ☐
					5" (127) ◯	3" (76) ☐	—	2 5/8" (67) ☐	3 3/4" (95) ☐	—
					6" (152) ◯	3 1/4" (83) ☐	6 1/2"(165) ☐	—	—	—

SUFFIX	OPTIONAL VARIATIONS:
☐ -1	Nickel bronze strainer
☐ -3	Stainless steel strainer
☐ -5	Sediment bucket
☐ -6	Security screws (T-20 Torx & pin)
☐ -7	½" trap seal primer connection
☐ -8	Backwater valve (2",3",4")
☐ -11	Acid resistant epoxy coated body
☐ -13	Galvanized body
☐ -15	Extension
☐ -21	Secondary flat stainless steel strainer (2", 3", 4")
☐ -28	Stainless steel body (Type 304)
☐ -30	PVC socket connection body
☐ -31	ABS socket connection body

SUFFIX	
☐ -34	Closure plug
☐ -40	Underdeck clamp
☐ -41	Sump receiver
☐ -49	Chrome Plated Strainer
☐ -90	Threaded side outlet (2",3",4") (cast iron only)
☐ -90NH	No hub side outlet (2", 3", 4") (cast iron only)
☐ -95	Client logo
☐ -ARRA	ARRA (Stimulus Act) compliant product
☐ -BA	Buy American Act compliant product
☐ -C	Membrane Clamp

SUFFIX	
☐ -C1	Clamp ring for low rough-in (min. 15/16" (24))
☐ (Standard)	No hub outlet
☐ P	Push on outlet
☐ -PA	Pennsylvania Steel Act compliant product
☐ T	Threaded outlet (2",3",4")
☐ X	Inside caulk outlet
☐ -Z	Extended wide elastomeric flange

Job Name: _____ Page No: _____
Section No: _____ Contractor: _____
Schedule No: _____ Purchase Order No: _____

MIFAB *reserves the right to make changes in material and design without formal notice and obligation.*