

Location: _____




F1590-90

24" x 24" HEAVY DUTY PARKING AREA DRAIN WITH SIDE OUTLET

Specification: MIFAB Series F1590-90 powder epoxy coated parking area drain with side outlet, anchor flange, and extra heavy duty 24" x 24" (610 x 610) two section ductile iron grates with a free area of 200 square inches (129,032²). Grates to have maximum 13/16" (21) openings.

Function: Used in industrial factories, mechanical rooms, parking garages and other membrane finished areas. 24" x 24" tractor grate is used with all types of poured finished floors. The anchor flange provides maximum support for drain.

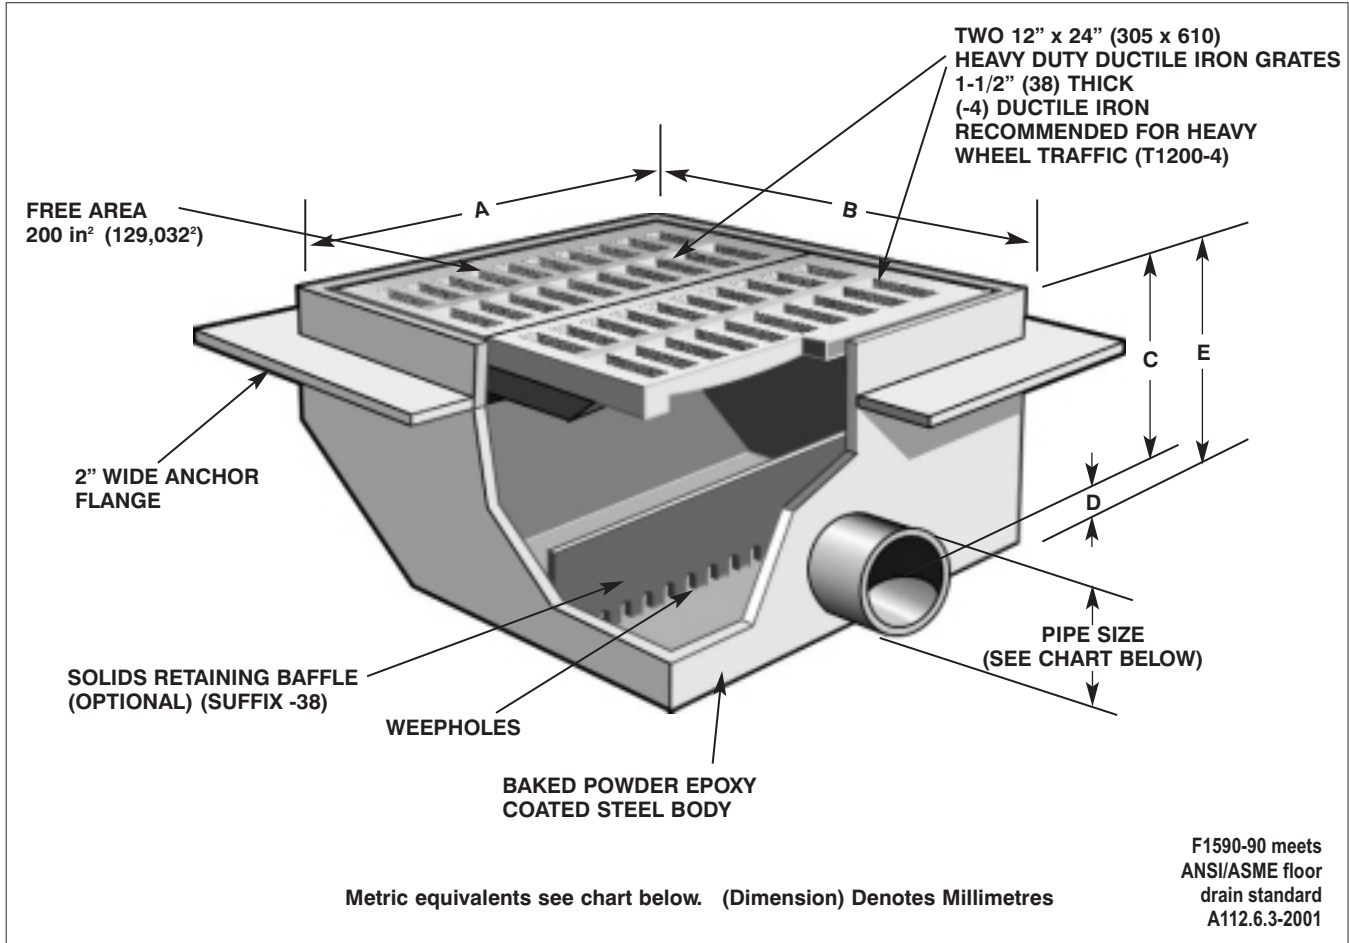

MODEL NO.	NO HUB PIPE SIZE	BODY DIMENSIONS				
		(A)	(B)	(C)	(D)	(E)
F1590-A-90	2" (51)					
F1590-B-90	3" (76)	24 1/2" (622)	24 1/2" (622)	16 1/2" (419)	5 1/2" (140)	22" (559)
F1590-C-90	4" (102)					
F1590-D-90	6" (152)					
F1590-E-90						

- SUFFIX OPTIONAL VARIATIONS:**
- 3 Stainless steel grates
 - 4 Ductile iron grates
 - 6 Security screws (TR30 Torx & pin)
 - 8 Backwater valve (2", 3", 4")
 - 12 Galvanized grates
 - 13 Galvanized body
 - 28 Stainless steel body (Type 304)
 - 38 Solids retaining baffle

- SUFFIX**
- ARRA ARRA (Stimulus Act) compliant product
 - BA Buy American Act compliant product
 - C Membrane clamp
 - PA Pennsylvania Steel Act compliant product
 - (Specify) Special outlet size

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.