

Location: _____




F1650-G

FLUSHING RIM FLOOR DRAIN WITH FLUSHING CONNECTION AND DEEP SEAL TRAP

Specification: MIFAB Series F1650-G flushing rim floor drain with white epoxy coated interior and exterior cast iron body, double wall deep seal trap with flushing connection, 3/4" (19) N.P.T. flushing connection in top assembly, anchor flange, membrane clamp, and stain finished (specify material finish) hinged grate and frame with stainless steel allen key vandal proof screws.

Function: Used in hospital operating and veterinary rooms, industrial and educational laboratories where waste must be drained to the sewer. Appropriate for mental institutions, zoos and prisons as drain type water closets.

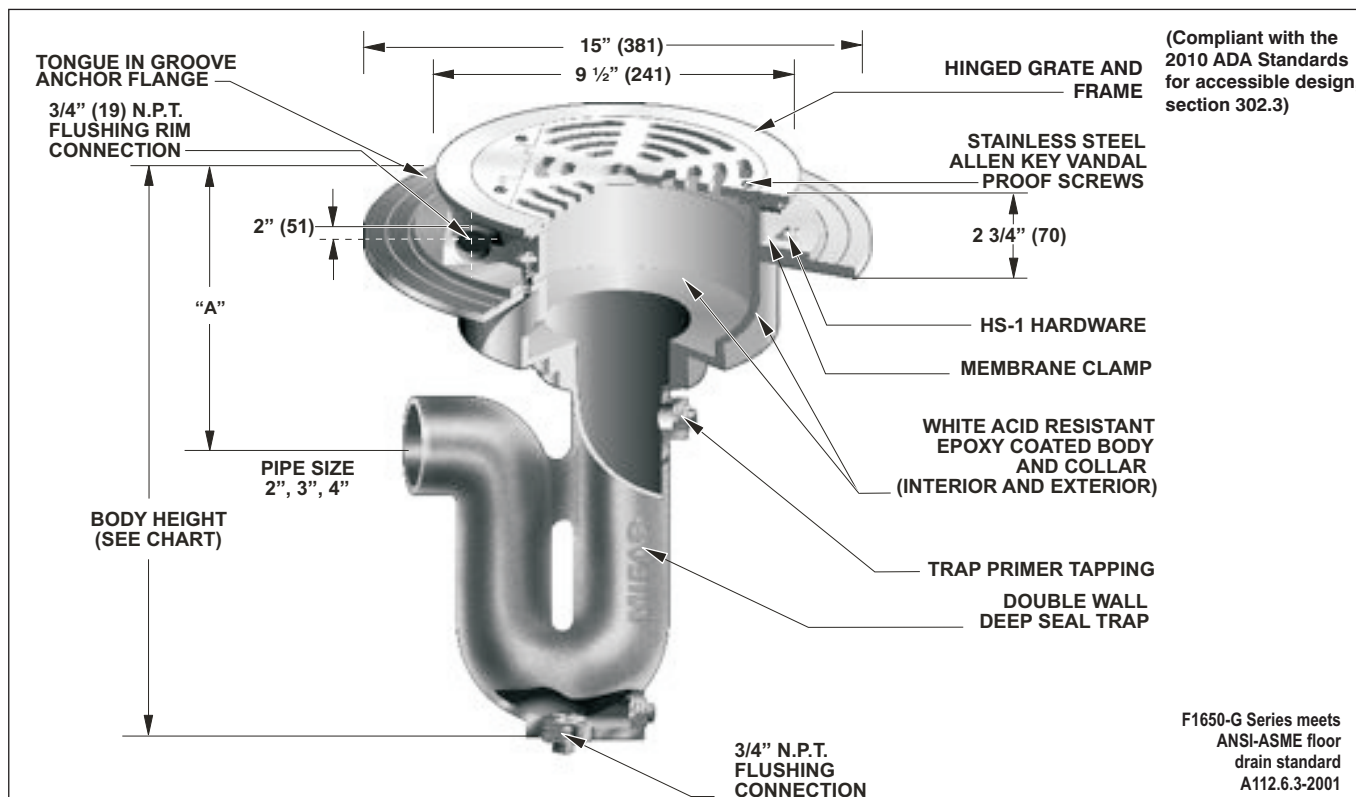

Note: See F1670 for water supply control box to be used with the flushing rim floor drain Use a vacuum breaker between the potable water supply and the connection to the flushing rim connection (by others).

STRAINER DIAMETER	ANSI/ASME RATING			PIPE SIZE	BODY HEIGHT				
	FREE AREA	LOAD RATING			NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
		N.B. (-1)	S.S. (-3)						
9" (229)	18 in ² (11,613 ²)	UP TO 2,000 LBS.	2,000 TO 4,999 LBS.	2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
				3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
				4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
				5" (127)	6" (152)	—	5 7/16" (138)	6 1/4" (159)	—
				6" (152)	7 1/4" (184)	7" (178)	7" (178)	6 1/4" (159)	—

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX		SUFFIX	
-1	Nickel bronze frame and grate	-31	ABS socket connection body	-BA	Buy American Act compliant product
-3	Stainless steel frame and grate	-34	Closure plug	-HP	Heel proof grate (1/4" maximum grate opening size, -3 only)
-5	Sediment bucket	-40	Underdeck clamp	(Standard)	No hub outlet
-6	Security screws (T-20 Torx & pin)	-41	Sump receiver	P	Push on outlet
-13	Galvanized body	-90	Threaded side outlet (2",3",4") (cast iron only)	-PA	Pennsylvania Steel Act compliant product
-21	Secondary flat stainless steel strainer (2", 3", 4")	-90NH	No hub side outlet (2", 3", 4") (cast iron only)	T	Threaded outlet (2",3",4")
-25-1	Nickel bronze hinged solid cover	-95	Client logo	X	Inside caulk outlet
-28	Stainless steel body (Type 304)	-A	Loose set grate	-Z	Extended wide elastomeric flange
-30	PVC socket connection body	-ARRA	ARRA (Stimulus Act) compliant product		

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____