

Location: \_\_\_\_\_




# F1760-FL

## 7" x 15" HEAVY DUTY GUTTER DRAIN WITH ANCHOR FLANGE

**Specification:** MIFAB Series F1760-FL lacquered cast iron heavy duty gutter drain with ductile iron grate and anchor flange.

**Function:** Used in membrane floor and trench areas that have width limitations for surface drainage. Long rectangular grate has large free area to drain surface water quickly.

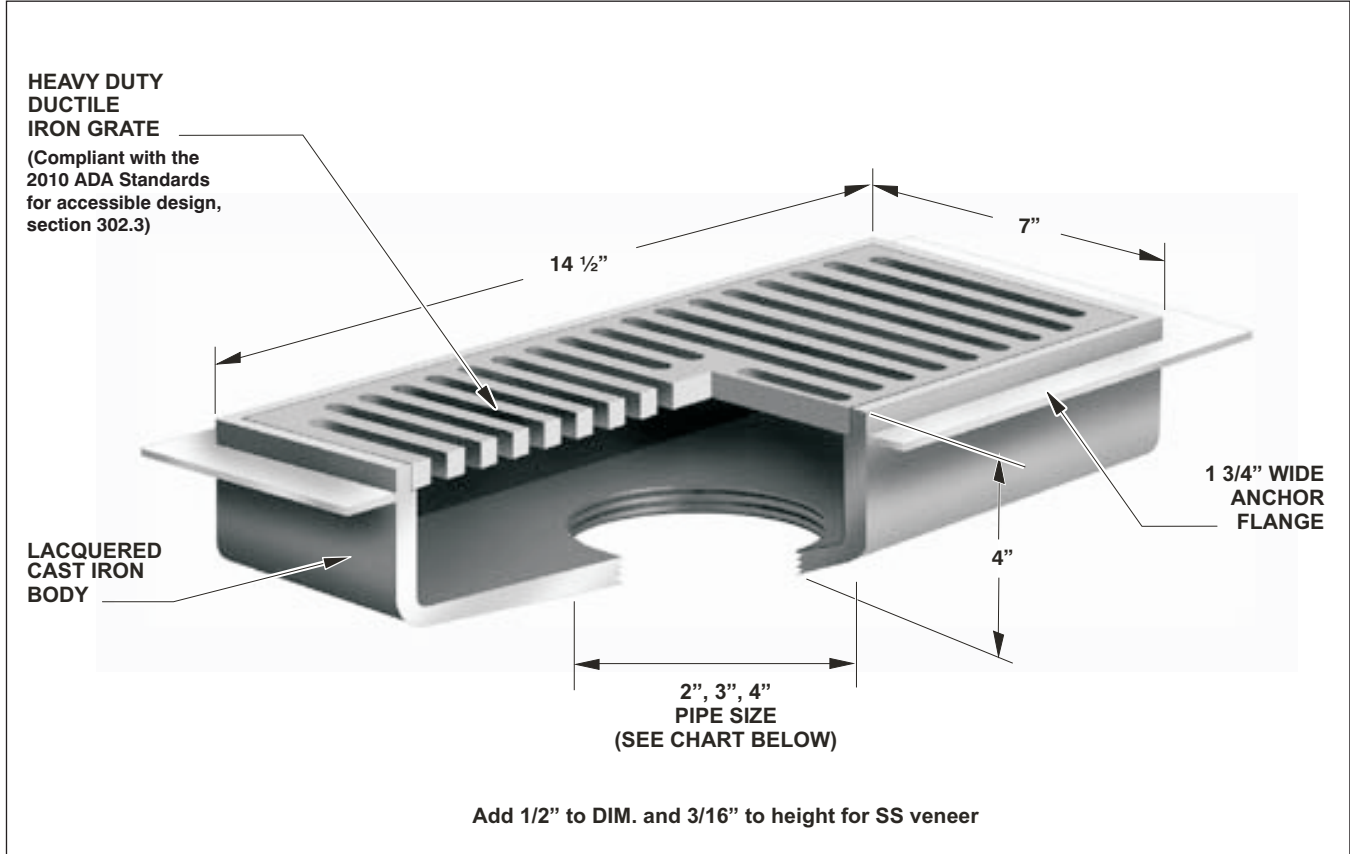

**Note:** 4" F.I.P. connection is standard. MIFAB's MI-850 Series of no hub adaptors can be assembled into the 4" F.I.P. connection.

STRAINER SIZE	ANSI / ASME RATING		BODY HEIGHT				
	FREE AREA	LOAD RATING S.S. (-3) D.I. (-4)	PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)
7" x 14 1/2" (178 x 368)	39 in <sup>2</sup>	OVER 10,000 LBS	2" (51)	4"(102)	4 5/8"(118)	3 1/2"(89)	5"(127)
			3" (76)	4"(102)	4 5/8"(118)	3 7/8"(98)	5"(127)
			4" (102)	4"(102)	4 5/8"(118)	3 7/8"(98)	5"(127)

**SUFFIX OPTIONAL VARIATIONS:**

- 3 Stainless steel veneer
- 6 Security screws (TR30 Torx & pin)
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 22 Less plange

**SUFFIX**

- ARRA ARRA (Stimulus Act) compliant product
- BA Buy American Act compliant product
- C Membrane Clamp
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- NH No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880