

Location: _____




MI-LINT

LINT INTERCEPTOR

Specification: MIFAB® Series MI-LINT sanitary powder epoxy coated inside and outside fabricated 10 gauge steel lint interceptor with flow rate of ____ (indicate). Unit shall include: (1/2" (13) thick fixed primary straining baffle with 3/8" (9) holes and secondary 1/2" (13) thick removable straining baffle with 3/8" (9) holes, removable cross bar, securing bolt(s), stainless steel calibrated orifice plate, and steel powder epoxy coated non skid rectangular gasketed lid(s).

Function: Used in commercial laundry facilities to receive wastewater with lint and sediment through the side inlet. Fixed primary straining and removable secondary straining baffle are designed to capture debris and prevent drain line clogging. Electrostatically applied powder epoxy coating ensures extra long life.

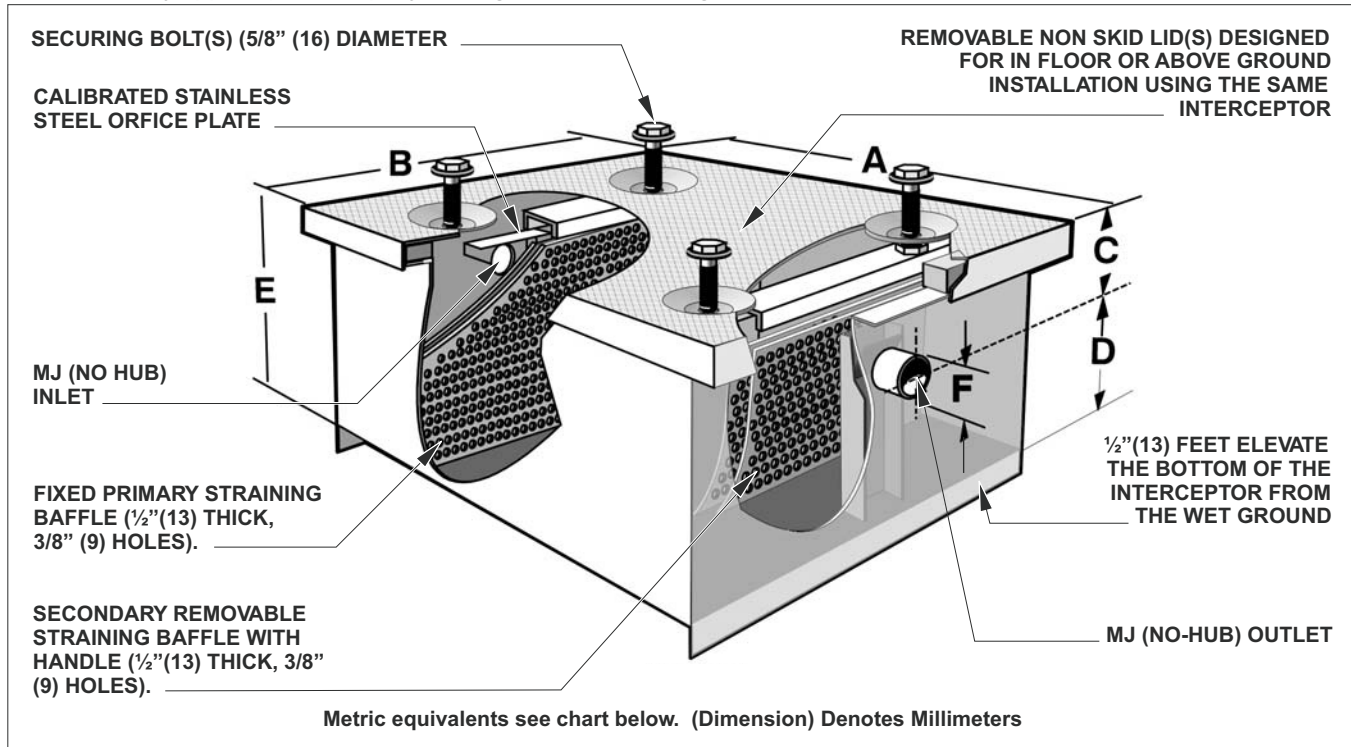

Note: The "C" dimension detailed above is from either the middle of the inlet or the outlet to the top the interceptor. The inlet and outlet dimensions are always the same.

MODEL NO.	US GPM	A	B	C	D	E	F	NO. OF LIDS	NO. OF BOLTS	LIQUID HOLDING CAP. (U.S.G.)
MI-LINT-1	34	29.5" (736)	20" (500)	3" (75)	17" (425)	20" (500)	2" (50)	1	4	34.29
MI-LINT-2	40	29.5" (737)	20.5" (513)	4" (100)	20" (500)	24" (600)	3" (75)	1	4	40.74
MI-LINT-3	80	33.5" (838)	26" (650)	4" (100)	26" (650)	30" (750)	3" (75)	2	4	80.18
MI-LINT-4	111	37.5" (938)	30" (750)	4" (100)	28" (700)	32" (800)	3" (75)	2	8	114.03
MI-LINT-5	155	55.5" (1388)	26" (650)	6" (150)	30" (750)	36" (900)	4" (100)	2	8	155.64
MI-LINT-6	213	67.5" (1688)	28" (700)	8" (200)	32" (800)	40" (1000)	6" (150)	3	12	213.80
MI-LINT-7	302	67.5" (1688)	28" (700)	10" (250)	44" (1100)	54" (1350)	6" (150)	3	12	302.26
MI-LINT-8	405	67.5" (1688)	30" (750)	12" (300)	54" (1350)	66" (1650)	6" (150)	3	12	404.91
MI-LINT-9	506	67.5" (1688)	40" (1000)	10" (250)	50" (1250)	60" (1500)	6" (150)	3	12	506.42
MI-LINT-10	750	91.5" (2288)	40" (1000)	8" (200)	54" (1350)	62" (1550)	6" (150)	4	16	868.65
MI-LINT-11	1017	98" (2450)	50" (1250)	12" (300)	54" (1350)	66" (1650)	6" (150)	4	16	1017.35
MI-LINT-12	1536	98" (2450)	50" (1250)	12" (300)	80" (2000)	92" (2300)	6" (150)	4	16	1536.00

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX	SUFFIX
-AL	Aluminum lid(s)	-FLM	Anchor flange and membrane clamp
-AP	Anode pack	-HD	Heavy duty reinforced lid(s)
-BA	Buy American Act compliant product	-H-20	H-20 traffic rated lid
-C	Extension "C" as required	-HLA	High level alarm
-CDF	Close down filter	-RSSB	Replacement stainless steel baffle
-FL	Anchor flange		
-FLC	Flow control fitting		
			-SB Sediment bucket
			-SS Stainless steel interceptor
			-T F.I.P. female threaded inlet and outlet
			-TL Lid(s) to receive tile or terrazzo
			specify Special size inlet and outlet

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.