

Location: _____




XL-MI-G

LARGE CAPACITY HYDRO MECHANICAL GREASE INTERCEPTOR

Specification: MIFAB Series XL-MI-G ____ sanitary, acid resistant, epoxy coated inside and outside fabricated 10 gauge steel hydro mechanical grease interceptor with flow rating of ____ (indicate) and grease holding capacity of ____ (indicate). Unit shall include: removable baffle assembly and cross bar, deep seal trap covered by lid, sewer gas stopper, securing bolt(s), stainless steel calibrated orifice plate, internal air relief by-pass, and steel acid resistant, powder epoxy coated, non skid, rectangular gasketed lid(s).

Function: Used in large restaurants, kitchens, institutions, industrial facilities such as food processing and packaging plants and other types of food processing areas where fat, oil and grease (FOG) drains with the wastewater. Interceptor may be installed on the ground, semi recessed or flush with the floor. Standard acid resistant, powder epoxy coated lid ensures maximum protection from contaminants. Sewer gas stopper prevents foul odors from entering the kitchen area through the interceptor.

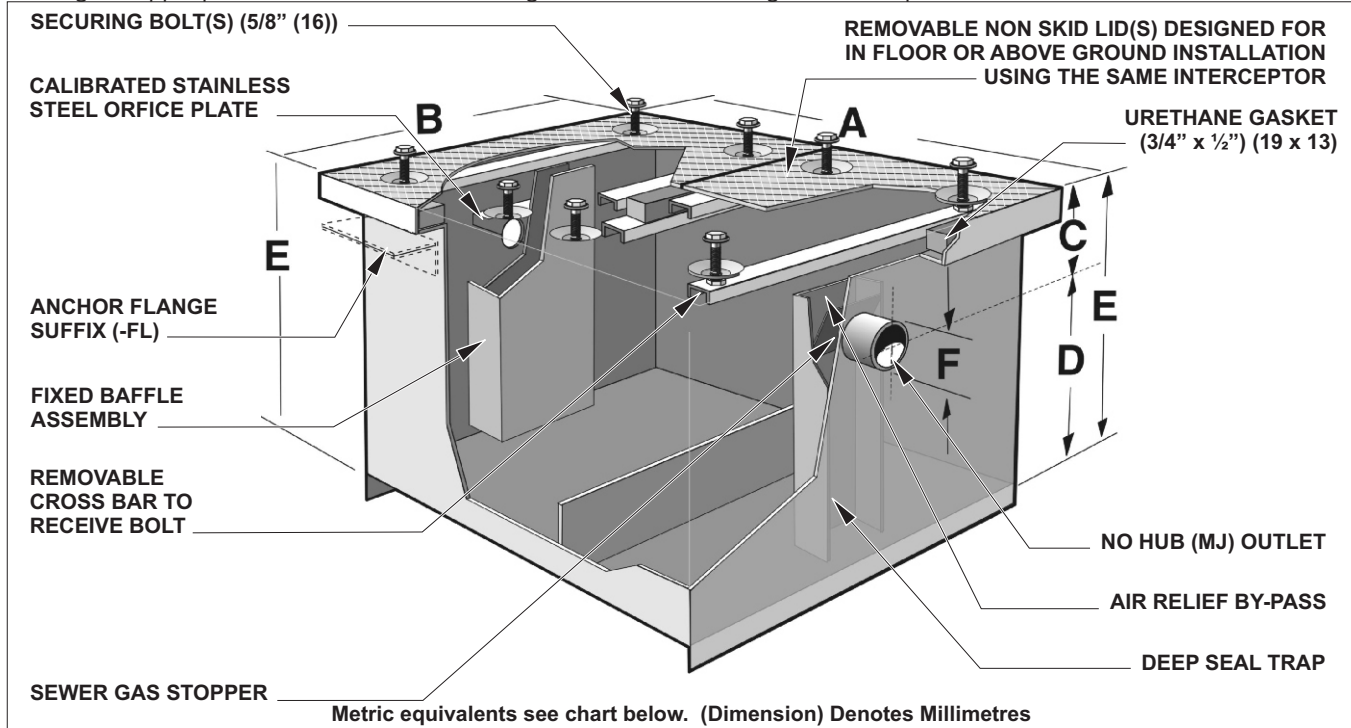

Note: The "C" dimension detailed above is from either the middle of the inlet or the outlet to the top the interceptor. The inlet and outlet dimensions are always the same.

| MODEL NO. | US GPM | GREASE CAP. LBS. | A | B | C | D | E | F | NO. OF LIDS | NO. OF BOLTS | SHIPPING WEIGHT (lbs.) | WEIGHT WHEN FILLED WITH WATER (lbs.) | LIQUID HOLDING CAP. (U.S.G.) |
|------------|--------|------------------|-------------|------------|-----------|------------|------------|----------|-------------|--------------|------------------------|--------------------------------------|------------------------------|
| XL-MI-G-0 | 75 | 150 | 42" (1067) | 28" (711) | 6" (152) | 26" (660) | 32" (813) | 4" (102) | 2 | 8 | 350 | 1268 | 108.05 |
| XL-MI-G-1 | 100 | 200 | 55" (1397) | 37" (940) | 8" (203) | 26" (660) | 34" (864) | 4" (102) | 2 | 8 | 520 | 2131 | 192.73 |
| XL-MI-G-2 | 125 | 250 | 58" (1493) | 38" (965) | 8" (203) | 28" (711) | 36" (914) | 4" (102) | 3 | 12 | 600 | 2496 | 226.91 |
| XL-MI-G-3 | 150 | 300 | 61" (1549) | 39" (991) | 8" (203) | 30" (762) | 38" (965) | 4" (102) | 3 | 12 | 700 | 2911 | 264.61 |
| XL-MI-G-4 | 200 | 400 | 70" (1778) | 44" (112) | 10" (254) | 34" (854) | 44" (1118) | 4" (102) | 6 | 24 | 1050 | 4356 | 395.64 |
| XL-MI-G-5 | 250 | 500 | 75" (1905) | 46" (1168) | 10" (254) | 38" (965) | 48" (1219) | 4" (102) | 6 | 24 | 1160 | 5343 | 501.00 |
| XL-MI-G-6 | 300 | 600 | 77" (1956) | 49" (1245) | 12" (305) | 40" (1016) | 52" (1321) | 4" (102) | 6 | 24 | 1240 | 6085 | 579.87 |
| XL-MI-G-7 | 350 | 700 | 80" (2032) | 51" (1295) | 12" (305) | 40" (1016) | 52" (1321) | 6" (152) | 6 | 24 | 1360 | 6475 | 612.18 |
| XL-MI-G-8 | 400 | 800 | 84" (2133) | 56" (1422) | 14" (356) | 44" (1118) | 58" (1473) | 6" (152) | 8 | 32 | 1540 | 8107 | 805.09 |
| XL-MI-G-9 | 500 | 1000 | 92" (2337) | 61" (1549) | 14" (356) | 54" (1372) | 68" (1727) | 6" (152) | 8 | 32 | 2150 | 11,945 | 1172.34 |
| XL-MI-G-10 | 600 | 1200 | 102" (2591) | 74" (1880) | 14" (356) | 62" (1575) | 76" (1930) | 8" (203) | 9 | 36 | 3000 | 18,105 | 1807.79 |
| XL-MI-G-11 | 750 | 1500 | 108" (2743) | 76" (1930) | 14" (356) | 66" (1676) | 80" (2032) | 8" (203) | 9 | 36 | 3280 | 20,870 | 2580.71 |

Note: Reduce the "A" and "B" dimensions by 1.75" (44) for -0, and 2" (51) for all other models to determine the actual body length and width dimensions. The lid overhangs the body by these dimensions.

| SUFFIX | OPTIONAL VARIATIONS: | SUFFIX | SUFFIX |
|--------|------------------------------------|---------|--|
| -AL | Aluminum lid(s) | -EP | Enzyme port |
| -AP | Anode pack | specify | Special size inlet and outlet |
| -BA | Buy American Act compliant product | -FL | Anchor flange |
| -C | Extension "C" as required | -FLC | External vented, flow control fitting |
| -DI | Dual inlets | -FLM | Anchor flange and membrane clamp |
| -DP | Dosing pump | | |
| | | | -HD Heavy duty reinforced lid(s) |
| | | | -H-20 H-20 traffic rated lid |
| | | | -HLA High level alarm |
| | | | -SB Sediment bucket |
| | | | -SS Stainless steel interceptor (Type 304) |
| | | | -T F.I.P. female threaded inlet and outlet |
| | | | -TL Lid (s) to receive tile or terrazzo |

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880