

Location: \_\_\_\_\_




# F1100-EF

## ROUND FUNNEL FLOOR DRAIN FOR NON-MEMBRANE FLOOR AREAS

**Specification:** MIFAB Series F1100-EF lacquered cast iron floor drain with anchor flange, weepholes, and standard 4" (102) round (specify strainer finish) funnel assembly with vandal resistant allen key screws. (For membrane floors, use MIFAB F1100-C-EF Series.)

**Function:** Used in restaurants, hospitals, industrial laboratories, and other non-membrane finished areas where indirect waste lines above the floor drip condensate or waste water into the hub. The funnel prevents splashing and directs the waste into the drain. The exposed section of the grate will drain any other water on the floor. The funnel is bolted to the grate with a concealed screw and may be moved to any other grate location. The 4" round funnel is recommended for single pipe use only.

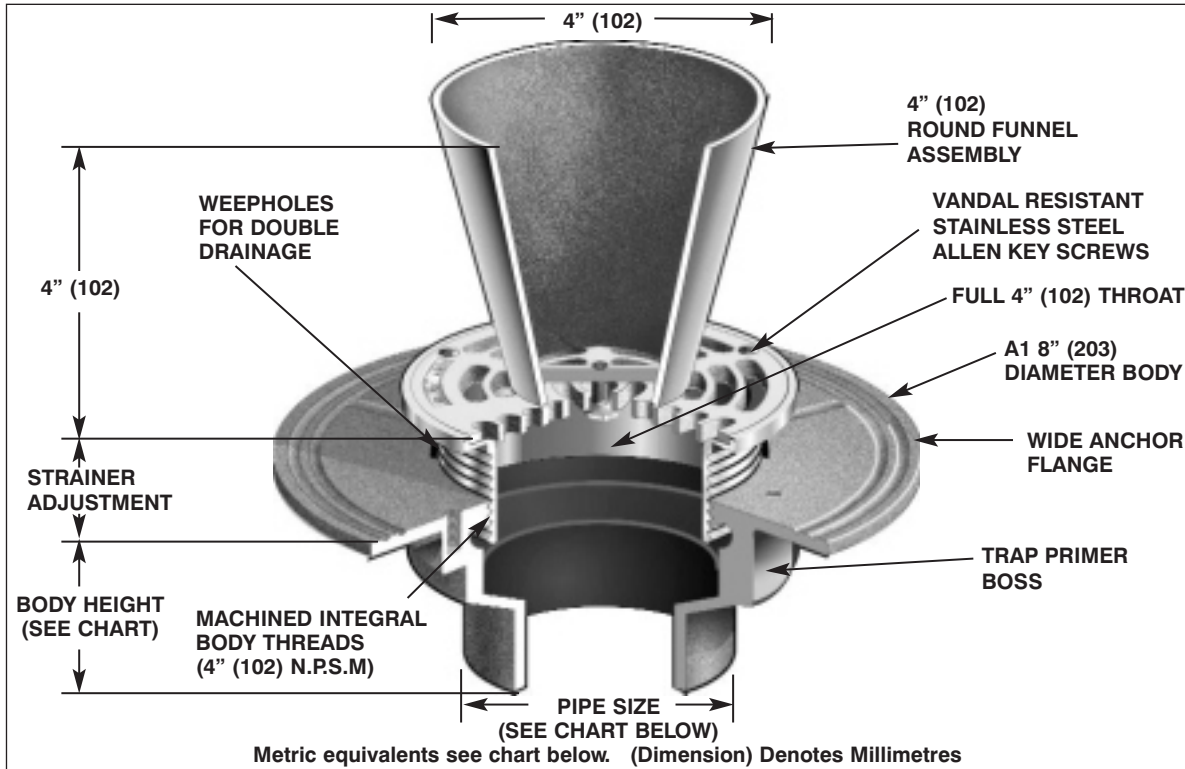

**PARTS:**



A1 BODY



EF-(\*)  
(\*) Denotes Strainer Finish (-1, -3 or -50)

F1100-EF Series meets ANSI-ASME floor drain standard A112.6.3-2001

STRAINER DIAMETER	STRAINER ADJUSTMENT MIN      MAX		PIPE SIZE	BODY HEIGHT				
				NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
5" (127)	1/2" (13)	1 1/2" (38)	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
			3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
			4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
			5" (127)	3" (76)	—	2 5/8" (67)	3 3/4" (95)	—
			6" (152)	3 1/4" (83)	6 1/2" (165)	—	—	—

<b>SUFFIX</b>	<b>OPTIONAL VARIATIONS:</b>	<b>SUFFIX</b>		<b>SUFFIX</b>	
-1	Nickel bronze strainer and funnel (standard)	-30	PVC socket connection body	-BA	Buy American Act compliant product
-3	Stainless steel strainer and funnel	-31	ABS socket connection body	-C	Membrane Clamp
-5	Sediment bucket	-34	Closure plug	-C1	Clamp ring for low rough-in (min. 1/2" (13))
-6	Security screws (T-20 Torx & pin)	-40	Underdeck clamp	(Standard)	No hub outlet
-7	1/2" trap seal primer connection	-41	Sump receiver	P	Push on outlet
-8	Backwater valve (2", 3", 4")	-49	Chrome plated strainer	-PA	Pennsylvania Steel Act compliant product
-11	Acid resistant epoxy coated body	-50	Lacquered cast iron funnel for unfinished areas	T	Threaded outlet (2", 3", 4")
-13	Galvanized body	-90	Threaded side outlet (2", 3", 4") (cast iron only)	X	Inside caulk outlet
-15	Extension	-90NH	No hub side outlet (2", 3", 4") (cast iron only)	-Z	Extended wide elastomeric flange
-21	Secondary flat stainless steel strainer (2", 3", 4")	-95	Client logo		
-28	Stainless steel body (Type 304)	-ARRA	ARRA (Stimulus Act) compliant product		

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_